

CONDURA

NEGOSYO NO FROST CHILLER INVERTER PRO

CBC227Ri, CBC283Ri,
CBC342Ri & CBC397Ri




CONDURA
KAYANG-KAYA!


TABLE OF CONTENTS

①	Parts and Features.....	2
②	Start-Up	3
③	How to Control Temperature based on Content..	4
④	Defrosting and Cleaning.....	5
⑤	Safety Information... ..	6
⑥	Energy Saving Tips	7
⑦	Proper Storage.... ..	8
⑧	Trou bleshooting Guide.....	1 0
⑨	Customer Care.... ..	1 2

1 Parts and Features



Temperature Control

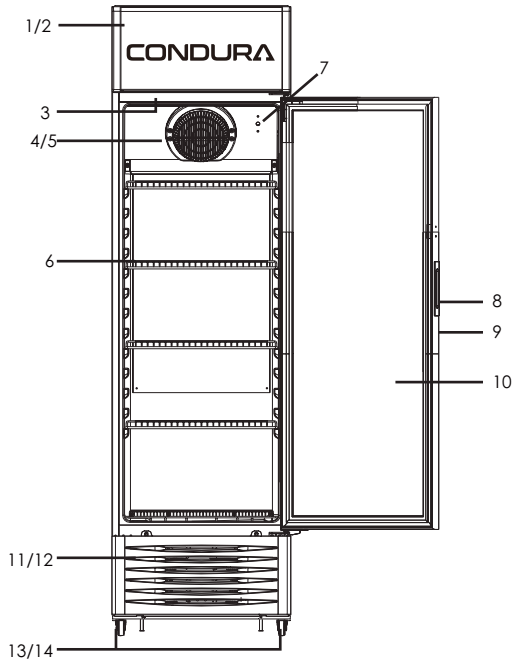


Part and Features Description	CBC227RI	CBC283RI	CBC342RI	CBC397RI
1 Logo Box	1	1	1	1
2 Logo Box Light	6W	6W	6W	6W
3 Internal Light (LED)	4W	4W	4W	4W
4 Fan (Evaporator)	1	1	1	1
5 Evaporator (Fin and Tube)	1	1	1	1
6 Wire Shelves	3	4	5	5
7 Control Knob	1	1	1	1
8 Recessed Door Handle	1	1	1	1
9 Lock and Key	1	1	1	1
10 Glass Door Ass'y	1	1	1	1
11 Front Panel	1	1	1	1
12 Fan (Condenser)	1	1	1	1
13 Feet Leveller (Front)	2	2	2	2
14 Roller Wheel (Back)	2	2	2	2
15 Drain Pan	Yes	Yes	Yes	Yes
Volume (Gross / Net) liters	227 / 198	283 / 255	342 / 314	397 / 366
Unit Dimension (W x D x H) mm	540 x 570 x 1833	540 x 610 x 2013	600 x 650 x 1990	600 x 650 x 2106
Packaging Dimension (W x D x H) mm	581 x 617 x 1898	581 x 657 x 2078	661 x 704 x 2058	661 x 704 x 2176
Weight (Gross / Net) kg	63 / 58	66 / 61	78 / 71	84 / 77

Actual design and location of accessories may vary depending on model.
Specifications and features are subject to change without prior notice.

2 Start-Up

Remove shipping package, tapes, etc., and leave the doors open for ventilation in a while.


1. Place the unit on a firm and flat surface, away from sunlight, heat source and moist areas. This appliance is intended for indoor use. Should not be exposed to rain.



NOTE: Install the unit in a well ventilated location.

2. Leave at least two(2) inches of space between chiller and wall, and 12 inches of space between your beverage cooler and ceiling or overhead cabinet.

3. For safety reason, it is advisable to ground the unit by connecting the ground wire provided at the back of the unit

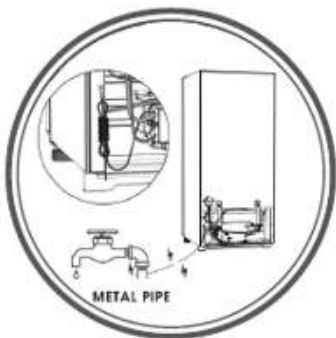

Do not connect the grounding wire to any gas pipes or phones lines.

4. Allow the compressor oil to settle for 3 - 4 hours before plugging the unit.

5. The unit was cleaned before shipment. However, it is recommended to clean the interior compartment before use.

6. Plug the unit to 230V wall outlet. Do not use extension cord.

7. Allow the unit to operate for about Four(4) hours at maximum setting (no. 8) to cool the compartment before placing items in the chiller.

After 4 hours adjust the temperature based on the actual load of the compartment. See Page 4.

WAIT FOR 5 MINUTES OR MORE

BEFORE RE-STARTING,
OTHERWISE THE FOLLOWING
CONDITIONS MAY HAPPEN


- Re-starting the unit immediately after it has been turned-off, may cause fuses to blow and activate the circuit breaker.
- The compressor may be overloaded.
- Damages may occur on the unit.

Note:
Sweating on the glass door is NORMAL in cold weather. It is recommended to set the temperature at lower setting.


③ How to Control Temperature Based on Content

Numbers on the control knob do not represent the actual temperature.

Setting no. "8" represents the coldest temperature. Setting no. "5" for storing MODERATE amount of drinks/food.


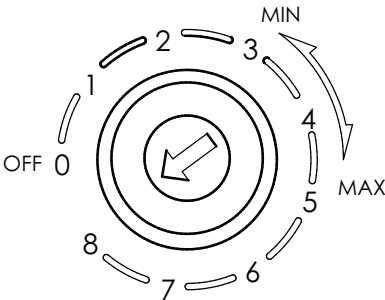


Recommended Setting for Temperature Control Knob

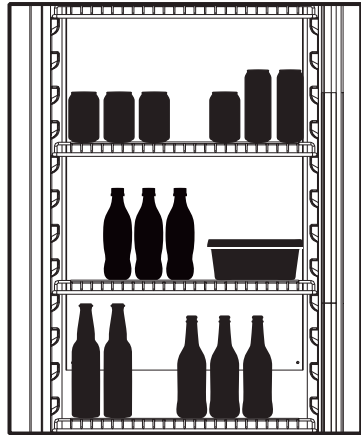

Setting no. "3" for storing MINIMAL amount of drinks /food.


Setting no. "6-8" for storing LARGE amount of drinks/food.

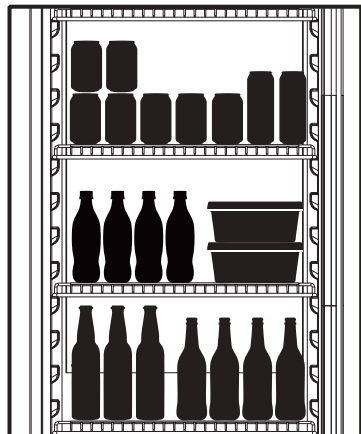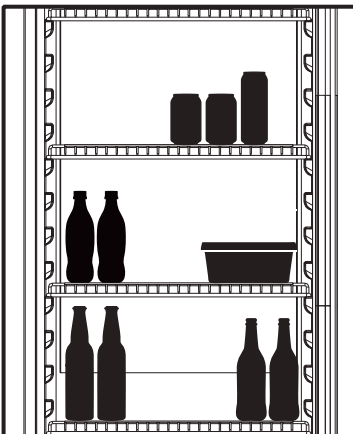

4 Defrosting and Cleaning

Defrosting is performed automatically and drained water is collected in the drain pan.

Drain Pan for all models.

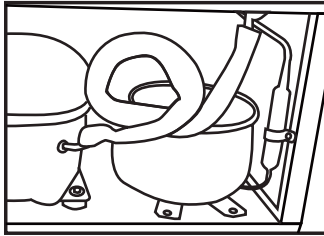

For CBC227Ri, CBC283Ri , CBC342Ri & CBC397Ri models. Water in the drain pan is evaporated automatically. No need to remove the drain pan.

CLEANING



WARNING: Do not splash water directly unto the cooler and do not wash with water. Short-circuit and electrical shock could result to this.

- NEVER USE POLISHING POWDER, SOAP POWDER, BENZINE, OIL, HOT WATER, ACETIC ACID, GASOLINE, THINNER , SCRUB BRUSH AND OTHER HARSH CHEMICALS - as this will damage the painting and plastic components.
- Before cleaning, ensure that the plug is removed from the power outlet to PREVENT ELECTRICAL SHOCK.
- Remove all contents including the wire-shelves.
- Use soft, dry cloth. Moistened it with water and liquid detergent. Wipe the dirt outside and inside your beverage cooler.
- Using a separate cloth wipe again the affected area for better cleaning result.

CAUTION or WARNING:
Do not use mechanical devices or other means to accerelate the defrosting process.


5 Safety Information

A. Power Cord

Call Customer Care Hotline or any authorized service center immediately for replacement or repair of damaged power cord.

Ensure that hands and rug are dry when touching or cleaning the power cord.

When unplugging, always grip the power plug firmly and do not pull or jerk the power cord.

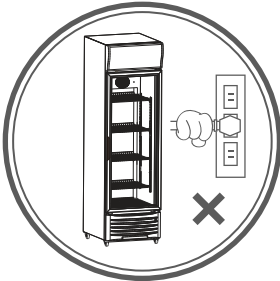

Do not plug the unit in loose sockets. Ensure that the power cord is not bent excessively or pressed down by heavy object. Do not use extension cord.



To prevent overheating, directly connect the appliance to the wall outlet. Do not use extension cord.

B. Storage

Storing hazardous chemicals, such as gasoline and benzenes can cause an explosion.

C. Handling

Call Customer Care Hotlines or any authorized service center immediately if you encounter any problem. Do not attempt to disassemble or repair your beverage cooler.

Avoid water contact near the temperature control knob to prevent electric shock.

D. Disposal

Please contact local authorities for the proper disposal of your beverage cooler. The gas in the insulation material requires special disposal procedures.

Caution:

Do not touch the evaporator with wet hands to avoid frost bite.


Do not let the children or anyone who lacks experience and knowledge to play or operate the appliance.



Warning: The LED Light must not be replaced by the user. If the LED/bulb is damaged, it is highly recommended to have our authorized service personnel to do the replacement for you. Call our customer care hotline for more information.

6 Energy Saving Tips


1. Cool down hot food items first before placing inside the chiller.

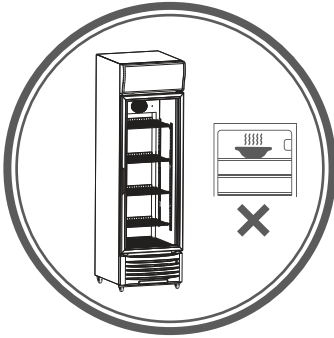

3. Properly adjust temperature setting according to load.

4. . Defrost and clean the chiller regularly.

2. Do not keep the chiller door open for too long when putting in or taking out food or beverages.

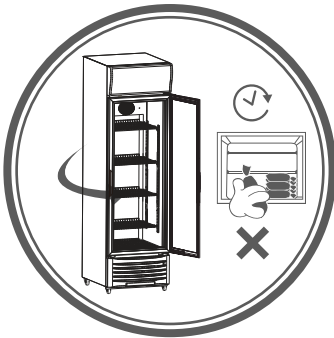


7 Proper Storage


The chiller employs a forced circulation of cold air system. If circulation of cold air is obstructed, the items will not be adequately refrigerated.

PAY ATTENTION TO THE FOLLOWING POINTS:

- Do not let items obstruct the air flow coming from the fan.

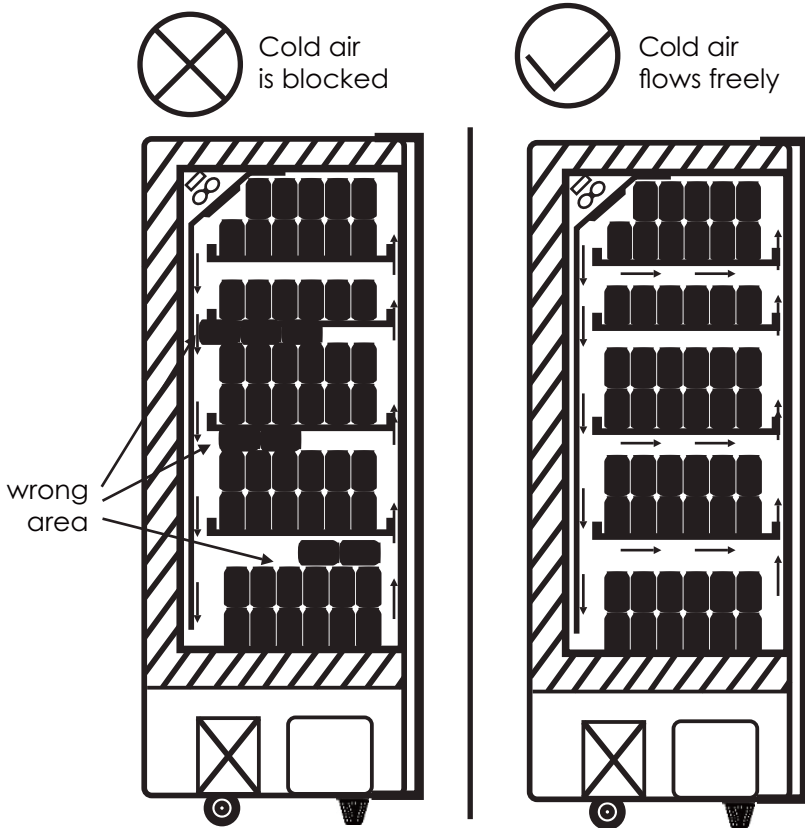

- Arrange items properly so that they do not protrude from the shelves.

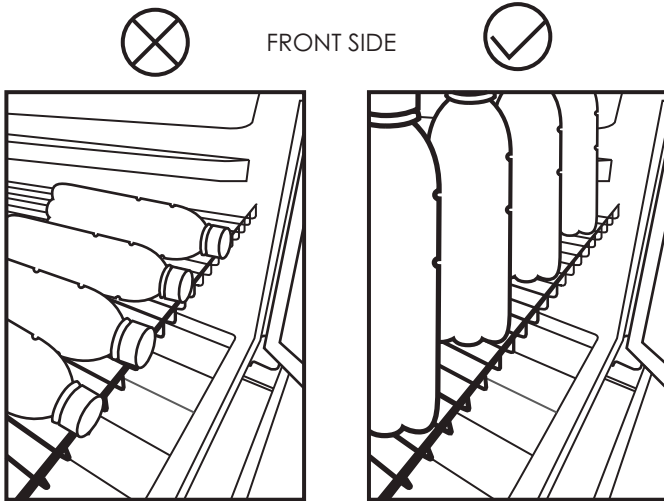

- The gap between the shelves and the door is used for circulation of cold air.



- Place the items evenly on all shelves.
- The shelves can be adjusted. Arrange the shelves in accordance with the height of the items to be placed in the cooler.

Note:
Place the bottles in an upward position.

8 Troubleshooting Guide

PROBLEM ENCOUNTERED	CHECK IF
1. When cooler would not turn ON.	1. The power cord is properly plugged-in. 2. The temperature control knob is in "OFF" setting.
2. When cooler is not cooling.	1. The temperature control knob is properly set. 2. The door is properly closed.
3. When cooler emits foul odor.	1. There is spoiled food or drink inside the cooler. 2. The cooler is not completely clean.
4. When there is sweating in the exterior of the cooler cabinet during cold weather.	1. The temperature control knob is set according to load. It is recommended that you lower the temperature setting during cold weather.
5. When the cooler makes "unusual noise" like sizzling, tickling, or humming.	Please note that these maybe normal sounds which indicate that your ref is working properly: "Sizzling" This indicates the refrigerant is passing through the evaporator inside the compartment. "Tickling" This indicates that the thermostat control is turning on and off. "Humming" This is the natural sound of the motor when it is working. This is also an effect of the air hitting the front panel when the fan motor is turned on to eliminate condensation on the glass door.
6. Condensation on cooler exterior.	Condensation may occur on the exterior and door during hot and humid days or depending on the place of installation. This occurs when the humidity is high and water particles in the air contact cold surface. THIS IS NORMAL. WIPE AWAY CONDENSATION WITH A DRY CLOTH.

If problem still occurs after checking all items above, please call our "Customer Care Hotlines" :

Trunkline - **02 8 863 5555**

TOLL FREE : **1800 10 888 8888**

Globe: **+63 917 536 3030**

Smart: **+63 947 996 2415**

***Numbers are subject to change without prior notice**

Please prepare the following information to be relayed to the Customer Care Representative who will take your call:

- Customer ID No (if already previously assigned one)
- Customer Name
- Address (House No., Block / Lot, Street, Subdivision, Barangay, City and Nearest Landmarks)
- Model & Serial No of your refrigerator (found on the sticker inside ref)
- Dealer Branch (where the unit was purchased)
- Date of purchase (according to sales invoice / receipt)
- Complaint or problem encounter



**Scan QR code for
service needs**

You may also scan the provided QR code to book a service

Fill-up this warranty card completely and mail within 15 days from date of purchase. This will activate your two (2) years warranty that is VALID FOR NEGOSYO USE. Only from Condura!

CONDURA

MODEL NO.: _____ SERIAL NO.: _____
 DEALER: _____ BRANCH: _____
 DATE OF PURCHASE: _____ DEALER INVOICE NO.: _____
 CUSTOMER NAME: _____ EMAIL ADDRESS: _____
 ADDRESS: _____
 TELEPHONE NO.: _____ MOBILE NO.: _____

I consent to the collection, processing and use by Concepcion Durables, Inc. (CDI) of the data below for the purposes identified in its Data Privacy Notice published in its website (www.condura.com), which is deemed incorporated into this Warranty Card.



CONDURA

PRODUCT WARRANTY CERTIFICATE

IMPORTANT. PLEASE READ CAREFULLY

Concepcion Durables, Inc. (CDI) warrants the purchaser, that this CONDURA Beverage Cooler will be free from defective material and workmanship, and agrees to repair, or at its discretion, replace any defective material with a new or equivalent part, through any of its Authorized Service Center, only if found to be manufacturer's defect and in accordance with the terms of this warranty, subject to the following conditions:

1. WARRANTY PERIOD (from date of original purchase)

CONDURA

WARRANTY

1 YEAR	Fan Motor and Inverter Board
2 YEARS	SYSTEMPARTS & LABOR (Refrigerant, Filter Drier, Condenser, Fin and Tube Evaporator)
5 YEARS	COMPRESSOR
3 MONTHS	PLASTICPARTS (Rubber Gasket, Front: Light Box) Lighting (LED Light, FSL Lamp)
NO Warranty	Glass Door, Power Cord

There will be corresponding charges for labor and replacement parts after the warranty period.

2. COVERAGE OF WARRANTY

The CONDURA warranty is also applied to Beverage Coolers used for business and commercial purposes.

3. LIMITATIONS

This warranty is not transferable, valid only in the Philippines, and does not apply to damage(s) due to fire, improper use or abuse (punctured), force majeure (typhoon, flood, lighting, earthquake, etc.), use with voltage beyond the allowable range of 187V to 254V, or failure to follow operating instructions provided in the manual. If the serial number is removed or defaced, or if the unit has been tampered with, altered or in any way repaired, serviced or worked on by anyone other than authorized representative or Service Center, this warranty is considered null and void. Concepcion Durables, Inc. (CDI) offers this warranty as the only remedy available to the original purchaser for any defect that may arise within the warranty period. Correction of defects shall be considered as complete fulfillment of liabilities and responsibilities of CDI to the original purchaser. In no event shall CDI be held liable for any damage or consequence that may arise as a result of using this CONDURA product

MODEL NUMBER: _____ **SERIAL NUMBER:** _____

Note: Keep this warranty card together with the Original Sales Invoice / Official Receipt as proof of purchase. If date of purchase cannot be proven, warranty shall based on CDI's Invoice to Dealer.


CONCEPCION DURABLES INCORPORATED

CUSTOMER SERVICE DEPARTMENT

308 Sen. Gil Puyat Avenue, Makati City
Trunk line: 02 8 863 5555
TOLL FREE: 1800 10 888 8888
Mobile Nos.: 0917 536 3030 (Globe)
0947 996 2415 (Smart)

PO BOX 211 COMMERCIAL CENTER
MAKATI CITY

BUSINESS REPLY
Permit No. 2416A!
NO STAMP NEEDED



CONCEPCION DURABLES INCORPORATED

CUSTOMER SERVICE DEPARTMENT

GMA & LUZON Area
Address: 308 Sen. Gil Puyat Avenue, Makati City
Trunk Line: 02 8 863 5555
TOLL FREE: 1800 10 888 8888
Mobile Number: +63 917 536 3030 (Globe) "SMS Only"
+63 947 996 2415 (Smart) "SMS Only"
Covered Region/Areas: National Capital Region (NCR), Ilocos Region (Region I), Cordillera Administrative Region (CAR), Central Luzon (Region III), CALABARZON (Region IV-A), MIMAROPA except Romblon (Region IV-B), Bicol Region except Masbate (Region V)
Email Address: customer@condura.com

CEBU Regional Office

Address: Dr. A Esperanza Building, A.C Cortes Ave. Mandaue City
Telefax No: 032 328 1416 / 032 347 3380
Mobile Number: +63 947 996 2416
+63 921 222 0942
TOLL FREE: 1800 10 888 8888
Covered Region/Area: Masbate, Central Visayas (Region VII), Eastern Visayas (Region VIII)

ILOILO Regional Office

Address: 109 Yulo Street, Brgy. Yulo-Arroyo, Iloilo City, Iloilo
Telefax No: 033 336 1121
Mobile Number: +63 947 996 2417
+63 999 925 5736
TOLL FREE: 1800 10 888 8888
Covered Region/Area: Romblon, Western Visayas (Region VI)

CAGAYAN DE ORO Regional Office

Address: No. 102 CKY Center, Capistrano-Chavez Street, CDO City
Telefax No: 088 881 0615
Mobile Number: +63 947 996 2419
+63 939 253 5011
TOLL FREE: 1800 10 888 8888
Covered Region/Area: Zamboanga Peninsula (Region IX), Northern Mindanao (Region X), Autonomous Region in Muslim Mindanao (ARMM) except Maguindanao, Agusan del Norte, Surigao del Norte

DAVAO Regional Office

Address: 1C, Nand-Saling Building, Sobrecarey Street, Obrero, Davao City
Telefax No: 082 291 7276
Mobile Number: +63 947 996 2418
+63 922 294 1478
TOLL FREE: 1800 10 888 8888
Covered Region/Area: Davao Region (Region XI), SOCCSKSARGEN (Region XII), Agusan del Sur, Surigao del Sur, Maguindanao

*All contact information detailed above may change without prior notice.

CONDURA
KAYANG-KAYA!

www.condura.com